

Toothbrush Holder Exercise 1.



Prerequisite Knowledge Previous knowledge of the following commands is required to complete this lesson; **Sketch** (Line, Centerline, Circle, Add Relations, Smart

Dimension,), Extrude Boss/Base, and Edit Materials. A basic knowledge of

the drawing environment is also required

Focus of the Lesson This lesson focuses on designing a sheet metal part from the flattened state. In

this case, you create a sheet metal part and then insert bend lines on which to

fold the part.

Commands Used This lesson includes Sketch (Line/Centerline, Circle, Mirror Entities, Add

Relations, and Smart Dimension), Base Flange, Extruded Cut, Sketched

Bend and Edit Material.

A drawing of the sheet metal part will also be created.

New File Create a new part file.

Save File Save the file as 'Toothbrush Holder' to a folder called 'Holder exercise'

(Continue to save periodically throughout the exercise)



Getting Started

In order to begin working with **Sheet Metal** you must first activate the sheet metal tab on the command manager.

To activate this tab, right click on the command manager. Choose **Sheet Metal** from the drop-down list.



The Sheet Metal tab is now active on the command manager.



Note:

The Sheet Metal commands are also available from the drop down menu by selecting "Insert" and "Sheet Metal"...

Creating a sketch:

How do we start to model the toothbrush holder as a sheet metal part?

We begin by creating a sketch to generate the rectangular piece of acrylic required to manufacture the artefact.

What plane will this sketch be created on?

Because the material sits on the horizontal plane while we carry out the work, we will create a sketch on the Top Plane.

we will create a sketch on the Top Flane.

Create a rectangular sketch on the Top Plane. Left click On the 'Top' plane and click on the sketch icon

Smart Dimension

Features

Sketch

Corner Rectangle

Sketches a rectangle.

Sensors

Annotations

Right Sketch

🗓 💹 Lights, Cameras and Scene

From the Sketch toolbar, select the Corner Rectangle.




Left click on the Origin, move the cursor diagonally and left click on the opposite vertex to create the rectangle.


(Press 'Esc' to exit the Corner Rectangle command)



Note the automatic relations that are added to the sketch. If these are not shown, go View/Sketch Relations on the dropdown menu.



Select Smart Dimension from the Sketch toolbar and dimension the rectangle as shown.



Remember always to dimension from the shortest to the longest distances.

The sketch lines turn black when fully defined.

185


170

Exit the sketch



Sheet Metal Feature:

To create a sheet metal feature, click the **Sheet Metal** tab on the Command Manager and choose **Base Flange**

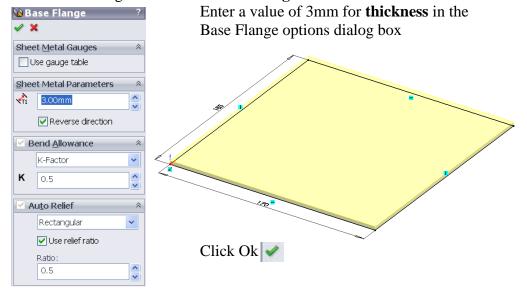



§ Toothbrush Holder

☐ Sensors

🗓 👱 Lights, Cameras and Scene

🚼 Material <not specified>

🗓 🔼 Annotations

🗓 😰 Equations

🔆 Riaht

🗼 Origin 👸 Sheet-Metal 1

🗓 🦳 Flat-Pattern 1

About Base Flange

A base flange is the first feature in a new sheet metal part. When you add a base flange feature to a SolidWorks part, the part is marked as a sheet metal part. Bends are added wherever appropriate, and sheet metal specific features are added to the FeatureManager design tree.

The Base-Flange feature is created from a sketch. The sketch can be a single open, single closed or multiple-enclosed profiles. There can be only one base flange feature in a SolidWorks part. The thickness and bend radius of the Base-Flange feature become the default values for the other sheet metal features.

When a base flange feature is created a number of items are added to the feature manager design tree.

Sheet-Metal1: is automatically added above the Base flange feature. It holds the default sheet metal settings such as sheet metal thickness, radius etc.

Sheet-Metal1 will remain at the top of the feature manager design tree (under 'Origin')

Sheet-Metal 1

Right click on **Sheet-Metal 1** and choose **Edit Feature**



The sheet metal settings may be changed here.

Set the bend radius to 1mm in the Bend Parameters Choose **OK**



Flat-Pattern Feature

This is added below the base flange feature. It has a couple of special properties that are not found with other features.


Unlike other features, flat-pattern will remain at the bottom of the tree. Other sheet metal features, when added, will appear overhead even though they are added after its creation. Secondly, the feature is suppressed when added to the design tree.

We will look further at this feature as we work through this exercise.



Creating the Rectangular holes

A sketch needs to be created on the top face of the Base Flange so that the rectangular holes can be formed.

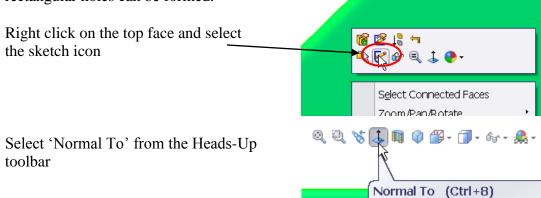


Select the 'Centerline' command from the Sketch Toolbar (use the down arrow beside Line command)




Hover over the edge of the base flange and the midpoint will appear

Sketch the vertical centerline




Using the Line Command, sketch the lines shown opposite







Select the two vertical lines by holding down the 'Ctrl' key. Add a 'Collinear' and 'Equal' relation between the two lines.




Select 'Mirror Entities' from the sketch toolbar



Select the 6 lines at the 'Entities to mirror'



Click on the 'Mirror about' dialogue box and select the centerline to mirror the sketch entities and select OK.




Introduction to Sheet Metal Toothbrush Holder

TECHNOLOGY SUBJECTS SUPPORT SERVICE

Dimension the sketch as shown below. Note that the sketch is fully defined.

Exit the sketch.



Extruded Cut

Select Extruded Cut from the Sheet Metal toolbar



Select the sketch containing the rectangles and select 'Through All' as the end condition.

Select 🗸



Rename Feature

Double click on the 'Extrude 1' feature and rename as 'Rectangular holes'

Circular Holes

Create a sketch on the top face of the base flange. Draw a vertical centerline as described earlier.


Select the 'Circle' command from the sketch toolbar








Create two circles, one of which is coincident with the centerline




Use 'Mirror Entities' to create a circle on the right of the centerline



Smart dimension as shown opposite


Exit the sketch

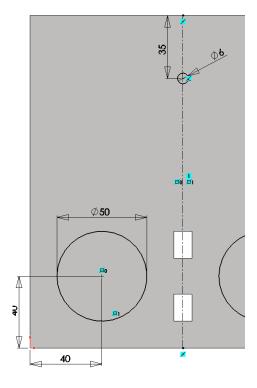




Extruded Cut

Select Extruded Cut from the Sheet Metal toolbar. Select the previous sketch in the graphics area and choose 'Through All' as the end condition.

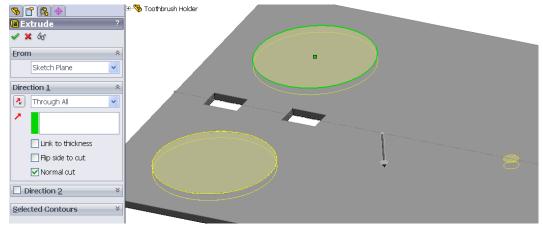

Rename feature


Rename this feature as 'Circular holes'




Shaping

Create a sketch on the top face of the base flange.

Using the Line command, create the sketch shown opposite




Select the line segment and arc by holding down the 'CTRL' key and apply a 'Tangent' relation






Apply a 'Tangent' relation between the arc and edge of base flange




Apply a 'Horizontal' relation between the endpoints of the line segments and the points of tangency in turn.



Dimension the sketch as shown opposite.


Exit the sketch.



Extruded Cut

Select Extruded Cut from the Sheet Metal toolbar. Select the previous sketch in the graphics area and choose 'Through All' as the end condition.

Rename as 'Shaping'






Filets

Select the 'Break-Corner/Corner-Trim' from the 'Sheet Metal' toolbar



Choose the settings in the property manager as indicated below

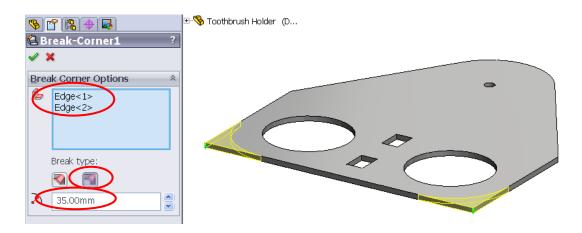


Sketched Bend


Create a sketch on the top face of the base flange.

Using the line command, sketch a line coincident with the endpoints of the shaping.


This line will be used as the bending line.




Select 'Sketched Bend' from the Sheet Metal Toolbar.









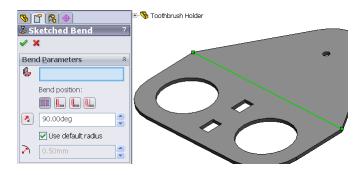


Select the face that you wish to remain horizontal after the bending process



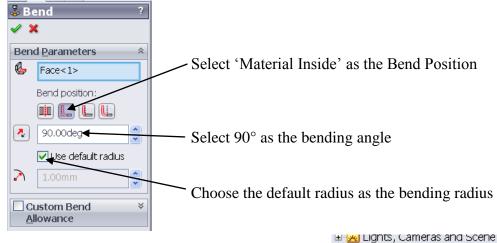


Edit Material


Right click on 'Materials <not specified> in the Design Tree and select 'Edit Material'



Scroll down to the 'Plastics' folder and select 'Acrylic (Medium-high impact' and choose 'Apply' and 'Close'





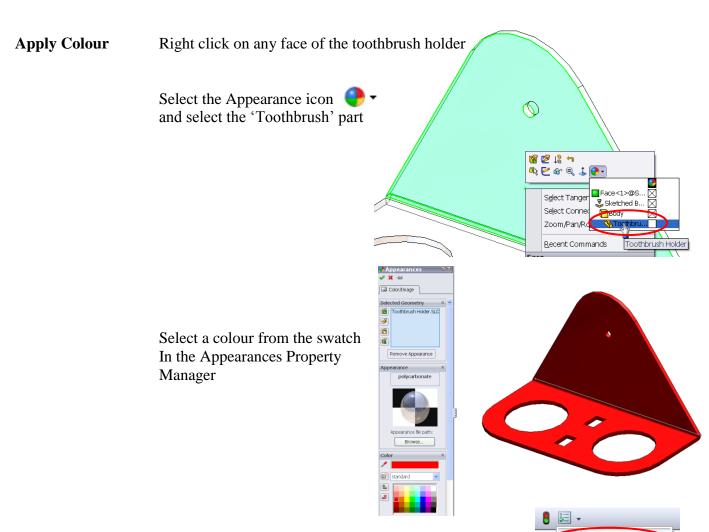

Improve Image Quality


Go to Tools/Options on the standard toolbar

Select 'Document Properties'



Select 'Image Quality' and move the slider to the right.

Select Ok.





Flat-pattern

It is added to the bottom of the feature manager design tree when we create a sheet metal part. As sheet metal features are added to the part it remains at the bottom. You will also notice that it is greyed out or **suppressed.**

Unsuppress Flat-pattern

Right click on the feature and choose **Unsuppress** from the pop-up toolbar





Or

Select 'Flatten' from the sheet metal toolbar



The sheet metal model flattens out into the surface development used to create it.





Suppress

Left click on **Flat-Pattern1** and choose **Suppress** to return to the unflattened state



Click on 'Flatten' in the sheet metal toolbar





Save

Save the 'Toothbrush Holder' part file.





Creating a drawing of the Toothbrush Holder

Drawings

SolidWorks enables drawings to be created from parts or assemblies. These drawings are **fully associative** with the parts and assemblies they reference. If the model is changed the drawing will update and vice-versa. A drawing is created using a pre-prepared template.

Drawing Templates These templates are used when creating presentation drawings. Parameters include sheet size, orientation etc.. The template may include a border, title block projection symbol, and text. When a presentation drawing is to be created using a part model, the template is the starting point. You should refer to the 'Creating Drawings' CAD notes for further information on creating, saving and editing templates

Creating Drawing

Make Drawing from Part/Assembly takes the current part and steps through the creation of a drawing file and initial drawing views using this part.

Where to find it?


Select Make Drawing from Part/Assembly on the Standard Toolbar or choose File, Make Drawing from Part/Assembly.

Getting Started

With the 'Toothbrush Holder' part file open, Select Make Drawing from Part/Assembly.



Select **Drawing** and then click **Advanced**



Choosing a Drawing Choose the drawing template you wish **Template** to use from the list displayed – **DCGA4L**

Choose OK







The DCG Templates will only be displayed here if they have been saved following the instructions outlined in the 'Creating Drawings' CAD resource exercise

Drawing Template

This template creates an A4 landscape drawing. The sheet format includes a title block, projection symbol, T4 Logo and text.



Note: For detailed instructions on editing the sheet format refer to 'Customising drawing templates' in the appendix to 'Creating Drawings' document



The view palette is displayed in the task pane. If this is not shown, click on the icon on the task pane


The file which we are creating the drawing from, **Toothbrush Holder**, is displayed on top.




Ensure **Auto-start projected view** is selected. This will project other views automatically from the parent view.

The standard views are displayed in the view palette as well as any saved views from the part file.

Because this is a sheet metal part, you will notice that a 'Flat pattern' view of the model is also given.



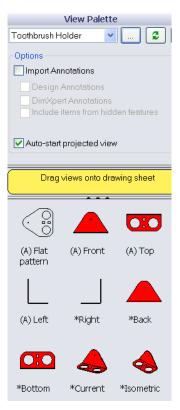




Select and drag the 'Front' view from the view palette into the drawing area.

Position in the top left hand corner, as shown.


This view is known as the **Parent View**.

The other orthographic views will be projected from this view.



Projected Views

Drag the cursor to the right to project an end view; left click to position the view. Repeat the procedure to project a plan view.




Projecting an Isometric View

A number of isometric views may be projected from this view also.

To project an isometric view, drag the cursor to any of the 4 corners of the front view. A different isometric view of the model will be displayed in each position.

Press 'Esc' to quit projected view




Positioning the View

When the cursor is dragged to position the isometric view on the sheet the projected view changes.

This may be overcome by holding down the **ctrl** key while dragging, thus allowing the current view to be positioned correctly.

Drag the view to a position overhead the title block, left click to position. Choose **OK** in the PropertyManager.





Insert Flat Pattern View

Select and drag the 'Flat pattern' view from the view palette into the drawing area




Repositioning Views


The orthographic views may be moved around the sheet but will maintain alignment.

To reposition a view, move the cursor over the view. A red dotted line will surround the view.

Position the cursor on the red dotted line, hold down the left mouse button and drag.




Reposition the views on the sheet



Display Style

Individual views may be displayed in a number of ways;



- Wireframe Displays all edges.
- **Hidden lines visible** Displays all edges, hidden lines are visible
- **Hidden lines removed** Displays edges that are visible at the chosen angle; obscured lines are removed.
- **Shaded with edges** Displays items in shaded mode with hidden lines removed.
- **Shaded** Displays items in shaded mode.

Edit display style

Highlight the **isometric view** by left clicking on the view.

All of the properties of that view appear in the PropertyManager.





Choose Shaded with Edges from Display Style and accept

The appearance that is on the part file now is visible on the drawing view



Adding Centre Marks

Centre Marks may need to be placed on circles or arcs in drawings. These may then be used as a reference for dimensioning.

Centre Marks must be added to all the circles in the various views

Toolbar.

Deselect Use document defaults

Input a Mark Size of 2mm

Select the circles representing the two holes in the various views

A centre mark will be added as shown





Adding Dimensions

While dimensions can be added to all the views, they will only be added to the flat pattern view in this case

Select the flat pattern view (a green box appears around it)



Select **Model Items** Model from the **Annotation** toolbar

Choose the Entire model as the source from which to import the dimensions.


Choose **Marked for drawing** dimensions from the model.

Choose OK





The position of the dimensions may need to be edited

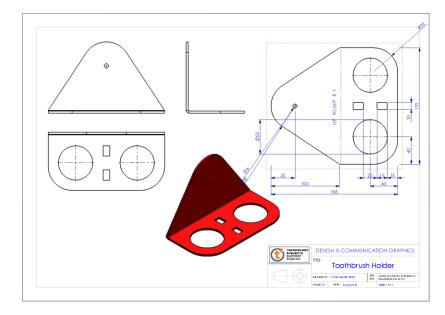


Editing Dimensions

Deleting dimensions To delete a dimension highlight it and press **delete** on the keyboard.

Move dimensions

Hold down the left hand mouse button on the dimension and drag. Inference lines will appear to ease alignment of dimensions.

Edit the dimensions by either moving or deleting them, to match the drawing.

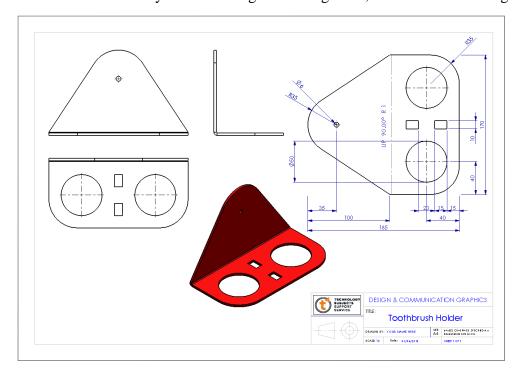



Manual

Dimensioning All of the necessary dimensions may not be present on the model. When this

> occurs the dimension must be inserted manually using **Smart Dimension**. This type of dimension is called a **driven dimension** because its value is driven by the model. Driven dimensions are shown in a different colour.

Smart Dimension

Select Smart Dimension Smart Dimension



from the **Annotation** toolbar.

Using the same technique as in dimensioning sketches, select the two edges defining the distance to be dimensioned. Drag and place the dimension.



Ensure that the zoom features are used to make placement and alignment of dimensions easier.

Detail View

A **Detail View** may be created in a drawing to show a portion of a view, usually at an enlarged scale. This detail may be taken from an Orthographic View, an Isometric View, a Section View or another Detail View.

The detail view is determined by the contents of a closed sketch. The default used is a circle

Where to find it


Select **Detail View** From the **View Layout** toolbar.



Choose Insert, Drawing View, Detail.

Create a Detail View


Click **Detail View**, the following prompt will appear.



Move the cursor to the approximate position of the centre of the viewing circle. Click and drag the radius.



Note – The position and radius of the viewing circle may be altered afterwards.






Positioning the View

When the viewing circle has been defined the detail view will appear.


Drag the view to position, click to drop it.



Full Outline

Selecting **Full Outline** will display the viewing circle in the detail view. Select **OK.**





Edit the scale


Select the detail view and apply a 2:1 scale



Editing the centre position

To edit the centre position, click on the circle. A blue dot with crosshairs appears at the centre.

Hold and drag this to reposition the centre.




Editing the radius

Hold and drag the circumference to increase the radius.



Using these two techniques, whilst displaying the detail view, will establish the detail view to show the required information.






Editing the title block

Right click on a clear area of the drawing sheet

Select 'Edit Sheet Format' – the drawing views will disappear as the sheet background is being viewed





Double click on 'Design and Communication Graphics'



While the text is highlighted, type in 'Leaving Certificate Technology'.

You can also edit the font type, size and colour while text is highlighted. Press 'Esc' when you have edited the text.

You can reposition the text box by left clicking on the text and dragging it into the required position



When finished, right click on the drawing sheet and select 'Edit Sheet' – the drawing views reappear



